




# Dock Floatation

## Heavy Duty Boat Lift Air Filled Dock Floats

Our heavy duty air-filled dock floats are made from a one piece roto-molded virgin-grade polyethylene outer shell, with a heavy 3/8" wall thickness for structural strength. Molded-in mounting holes in the top and bottom allow water intake and exhaust, while the top of the float drum has molded-in grooves for mounting to lift. Threaded inserts are also included for commercial fittings.

As with our other dock floats here at BARR, these boat lift air filled dock floats are resistant to UV rays and damage by animals, ice, bumps by watercraft and contact deterioration from petroleum products.

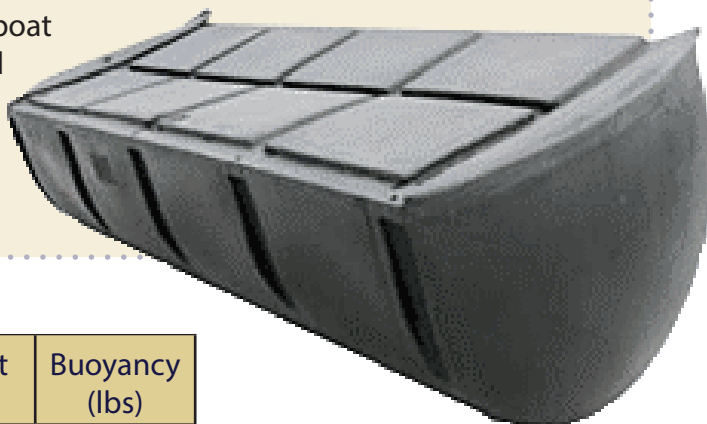

Part #	Size (in) w x l x h	Weight (lbs)	Buoyancy (lbs)
AT2630-60	30 x 26 x 60	85	1000
AT3030-72SQ	30 x 30 x 72	104	2150
AT3030-90	30 x 30 x 90	130	2000
AT3030-90SQ	30 x 30 x 90	160	2600
AT3240-108	40 x 32 x 108	200	3700
AT3240-108SQ	40 x 32 x 108	230	4500
AT3240-144SQ	40 x 32 x 144	300	6600
AT4848-20SQ	48 x 48 x 20	93	1460

SQ=Square bottom

