




Rainwater Harvesting Pumps

The Divertron Submersible Pumps

- Divertron X Model is equipped with a 1" FPT stainless steel intake fitting for use with floating suction assemblies.
- Divertron model has a screened intake around bottom of pump.
- Automatic operation (on / off) when taps are opened and closed.
- Built-in electronic pressure switch and flow sensor.
- Equipped with dry-run protection and built-in non return check valve.
- Easy to use.
- No wiring or pump start relay required for irrigation systems.
- High reliability.
- High performance 4-stage pump design.
- Supplied with 48 Ft. power cord.
- 115V A/C, 10 Amps Max.
- 157' Max Total Dynamic Head (TDH).
- Up to 25 GPM.
- Up to 64 PSI.
- CSA Approved

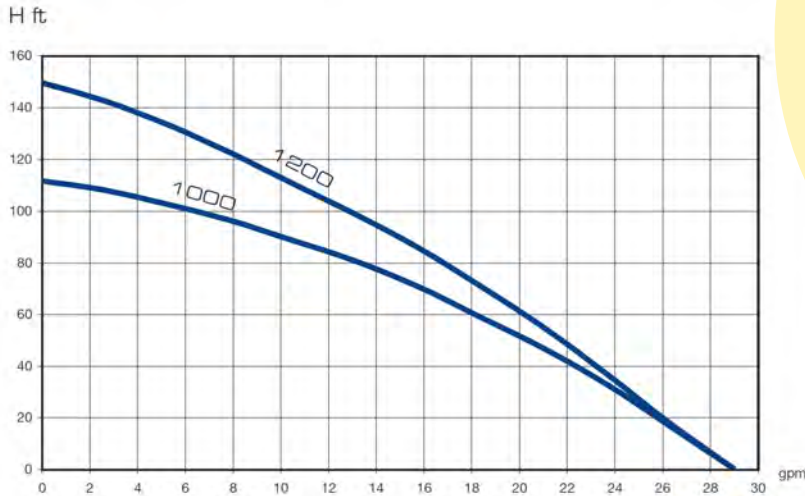

| Part # | Motor Type & HP | Max PSI/ Head | Max Flow Capacity | Inlet/ Outlet Size (in) | Liquid Temp | Elec. Volt/ Amp/PH | Solid Handling |
|----------------------------|------------------|---------------|-------------------|----------------------------|--------------|------------------------|----------------|
| Divertron 1200 / 60113145 | Electric, 3/4 HP | 118 ft | 25 GPM | 1 Bottom Screen Intake / 1 | 120 F / 49 C | 115 V, 10 AMP MAX, 1PH | NO |
| Divertron 1200X / 60113167 | Electric, 1 HP | 157 ft | 25 GPM | 1 / 1 | 120 F / 49 C | 115 V, 10 AMP MAX, 1PH | NO |