



if it flows,
we go with it


1.800.665.4499
barrplastics.com

Belowground Rainwater Harvesting

Internal Filters for GRAF Carat S

Filter Package 3


The Optimax-Pro Filter can be integrated into the basic Carat S tank. The convenient, low maintenance solution with self-cleaning filter and 95% water yield. This system utilizes an inflow stilling system to control water inflow and a Spannfix connection sleeve allows for seamless integration into your existing system. It can also be fitted with an Opticlean cleaning unit to provide a comprehensive self-cleaning unit directly within the filter. Tank and filter overflow are connected to the sewer network with this filter package with included overflow siphon and rodent guard keeping your water supply safe and clean.

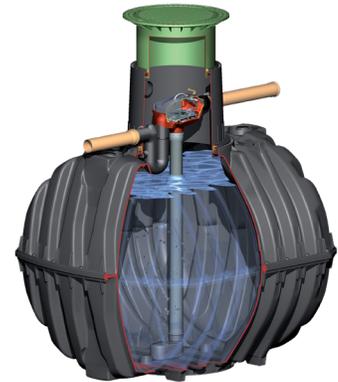

Part #	Description
342005	Filter Package 3 (incl. Optimax Pro Filter, Inflow Stilling System, overflow siphon/rodent guard and spannfix pipe connection sleeve)
340040	Internal Optimax Filter Only (w/ 4" connection) NOTE: hose not included

Optimax Pro Filter

- Provides over 95% water yield
- Low maintenance (self cleaning)
- Space-saving filter technology inside the tank
- Filter housing can be easily removed without tools transparent lid for filter visibility
- Can manage roof areas up to 3700 sqft
- Standard 4" connections
- Self-cleaning Opticlean system available (as separate purchase)
- Low offset height of 6.5" between inlet & outlet
- Very intense water jet for cleaning the filter sieve
- Routine maintenance intervals are kept to a minimum

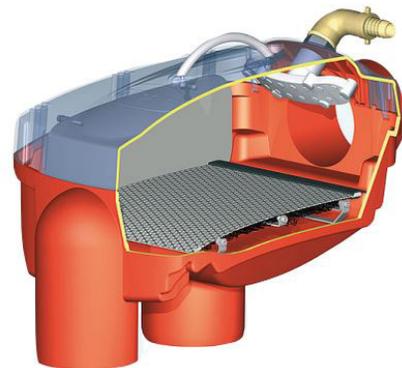

Dome Shaft	Tank Overflow (in)	Emergency Overflow (in)
Mini	19.5 - 26.4	25.9 - 33.9
Maxi	19.5 - 31.3	25.9 - 37.8