


Dock Floatation

Standard Foam-Filled Dock Floats

It's time to build an unsinkable dock with BARR's vast line of EPS foam-filled dock floats.

With a nominal 0.150 inch thick walls using virgin polyethylene with ultraviolet inhibitors to make the floats extra durable to withstand damage from harsh marine environments. The floats are suitable for both residential and commercial applications, and are backed by a 15-year limited manufacturer warranty.

With a one piece roto-molded polyethylene shell, they're relatively lightweight and are highly cost effective compared to concrete systems. Extra wide ribbing on the exterior of the floats proves easier tool access during install and tank tested buoyancy ratings are +0/-5%.









This document contains proprietary information. It is intended solely for use of potential clients involved or to be involved in a transaction with BARR Plastics Inc.




2 Foot Series

| Part # | Size (in) L x W x H | Weight (lbs) | Buoyancy (lbs) |
|-----------|---------------------|--------------|----------------|
| BD2436-12 | 36 x 24 x 12 | 24 | 327 |
| BD2436-16 | 36 x 24 x 16 | 28 | 442 |
| DB2436-20 | 36 x 24 x 20 | 32 | 524 |
| BD2448-8 | 48 x 24 x 8 | 25 | 287 |
| BD2448-12 | 48 x 24 x 12 | 31 | 434 |
| BD2448-16 | 48 x 24 x 16 | 37 | 598 |
| BD2448-18 | 48 x 24 x 18 | 38 | 642 |
| BD2448-20 | 48 x 24 x 20 | 43 | 719 |
| BD2448-24 | 48 x 24 x 24 | 46 | 867 |
| 2436-08 | 36 x 24 x 8 | 20 | 215 |
| 2448-36 | 48 x 24 x 36 | 70 | 1314 |
| 2496-08 | 96 x 24 x 8 | 52 | 555 |
| 2496-12 | 96 x 24 x 12 | 64 | 839 |
| 2496-16 | 97 x 24 x 12 | 75 | 1140 |





3 Foot Series

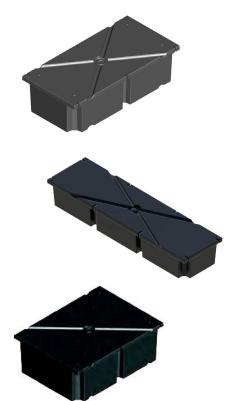


| Part # | Size (in) L x W x H | Weight (lbs) | Buoyancy (lbs) |
|-----------|---------------------|--------------|----------------|
| BD3648-8 | 48 x 36 x 8 | 32 | 471 |
| BD3648-12 | 48 x 36 x 12 | 44 | 691 |
| BD3648-16 | 48 x 36 x 16 | 51 | 905 |
| BD3648-20 | 48 x 36 x 20 | 59 | 1114 |
| BD3648-24 | 49 x 36 x 24 | 67 | 1346 |
| BD3672-12 | 72 x 36 x 12 | 65 | 1059 |
| BD3672-16 | 73 x 36 x 16 | 72 | 1359 |
| BD3672-20 | 74 x 36 x 20 | 84 | 1727 |
| BD3672-24 | 75 x 36 x 24 | 96 | 2090 |
| BD3672-32 | 76 x 36 x 32 | 107 | 2575 |
| BD3696-12 | 96 x 36 x 12 | 81 | 1414 |
| BD3696-16 | 97 x 36 x 16 | 94 | 1822 |
| BD3696-20 | 98 x 36 x 20 | 114 | 2298 |
| BD3696-24 | 99 x 36 x 24 | 127 | 2687 |
| 3648-08 | 48 x 36 x 8 | 37 | 429 |
| 3648-18 | 49 x 36 x 18 | 52 | 982 |
| 3648-32 | 50 x 36 x 32 | 152 | 3409 |



4 Foot Series

| . | | | |
|-----------|---------------------|--------------|----------------|
| Part # | Size (in) L X W x H | Weight (lbs) | Buoyancy (lbs) |
| BD4848-12 | 48 x 48 x 12 | 53 | 937 |
| BD4848-16 | 48 x 48 x 16 | 67 | 1220 |
| BD4848-20 | 48 x 48 x 20 | 77 | 1520 |
| BD4848-24 | 48 x 48 x 24 | 88 | 1799 |
| BD4860-12 | 60 x 48 x 12 | 63 | 1190 |
| BD4860-12 | 60 x 48 x 16 | 80 | 1552 |
| BD4860-20 | 60 x 48 x 20 | 87 | 1900 |
| BD4860-24 | 60 x 48 x 24 | 98 | 2300 |
| BD4872-12 | 72 x 48 x 12 | 83 | 1406 |
| BD4872-16 | 72 x 48 x 16 | 96 | 1863 |
| BD4872-20 | 72 x 48 x 20 | 112 | 2280 |
| BD4872-24 | 72 x 48 x 24 | 126 | 2702 |
| BD4872-32 | 72 x 48 x 32 | 166 | 3560 |
| BD4896-12 | 96 x 48 x 12 | 110 | 1834 |
| BD4896-16 | 96 x 48 x 16 | 130 | 2475 |
| BD4896-20 | 96 x 48 x 20 | 144 | 3076 |
| BD4896-24 | 96 x 48 x 24 | 164 | 3618 |
| BD4896-32 | 96 x 48 x 32 | 227 | 4804 |
| 4848-32 | 48 x 48 x 32 | 106 | 2191 |
| 4860-32 | 48 x 60 x 32 | 130 | 2800 |
| 4872-28 | 72 x 48 x 28 | 141 | 3042 |
| 48120-20 | 120 x 48 x 20 | 176 | 3692 |

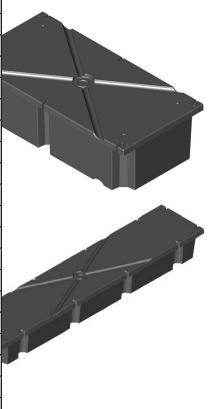

Additional Sizes



| Part # | Size (in) L x W x H | Weight (lbs) | Buoyancy (lbs) |
|-----------|---------------------|--------------|----------------|
| BD2072-8 | 72 x 20 x 8 | 32 | 376 |
| BD2072-10 | 72 x 20 x 10 | 34 | 450 |
| BD2096-10 | 96 x 20 x 10 | 40 | 595 |
| BD1248-12 | 48 x 12 x 12 | 17 | 203 |
| BD1248-20 | 48 x 12 x 20 | 27 | 345 |
| BD4272-16 | 72 x 42 x 16 | 84 | 1627 |
| 4272-12 | 72 x 42 x 12 | 70 | 1159 |
| 1848-36 | 48 x 18 x 36 | 53 | 920 |





Permafloat® I5 YEAR WARRANTY

EFFECTIVE 6/1/2008 NEW STYLE (08) PERMAFLOAT ONLY

Cellofoam North America Inc ("Manufacturer") warrants our encapsulated flotation, to the original owner ("Purchaser"), against cracking, peeling, sloughing, and excessive deterioration from ultraviolet rays while retaining resiliency under normal usage for a period of 15 years. The first 11 years are non-prorated. Years 12, 13, 14 and 15 are prorated at 40%, 30%, 20% and 10% of the original purchase price respectively. Defects in workmanship are warranted for a period of 1 year.

Purchaser's remedy is expressly limited to repair or replacement of the defective encapsulated flotation. Determination of a product defect is solely at Manufacturer's decision. At Manufacturer's election we will repair, replace or credit Purchaser with an amount not to exceed the original purchase price or portion thereof based on the above scale of prorated coverage. Purchaser shall, within 10 days of discovery, send written notification and the original proof of purchase, to Manufacturer by registered or certified mail of any claim under this warranty. Purchaser will provide Manufacturer with an opportunity to inspect the encapsulated flotation as necessary by returning prepaid to Manufacturer's Conyers, GA plant. In no event shall Manufacturer be liable for any defective encapsulated flotation should examination reveal misuse, negligence, alteration, ice damage, accident, improper installation, overloading, maintenance, repair or acts of God.

Manufacturer makes no representation or warranty of any other kind, expressed or implied with respect to the product(s) sold hereunder as to merchantability, fitness for any purpose, or legality of use in any jurisdiction. Manufacturer shall not be liable for any loss of use, cost, fees or any liability for direct, indirect or consequential damages or delays. No other person, firm or corporation can bind Seller to any warranty other than herein above stated.

The laws of the State of Georgia shall govern this limited warranty.





CONYERS, GA 1961 Rockdale Industrial Blvd. 30012 SALLISAW, OK 400 E. Houser Ave. 74955

